

CRAMMER FEEDER EXTRUDER DATA SHEET

CUSTOMER: _____

DATE _____

ADDRESS: _____

ORDER NUMBER _____

SUPPLY VOLTAGE: _____ V.A.C. _____ PHASE _____ HERTZ

EXTRUDER SPEED TRACKING SIGNAL: AC DC 0-25V, 0-120V, 0-550V, 4-20mA or SPECIAL

MATERIAL(S) TO BE FED:


PELLETS _____ RATE: _____ LBS/HR. APPROX. BULK DENSITY _____ LBS/CU. FT

FLUFF _____ RATE: _____ LBS/HR. APPROX. BULK DENSITY _____ LBS/CU. FT

OTHER _____ RATE: _____ LBS/HR. APPROX. BULK DENSITY _____ LBS/CU. FT

EXTRUDER SIZE: _____ (INCLUDE DIM'S. INDICATED BELOW) MFR. _____

EXTRUDER INPUT SIGNAL FOR EXTRUDER SPEED FOLLOWING (SELECT ONE):

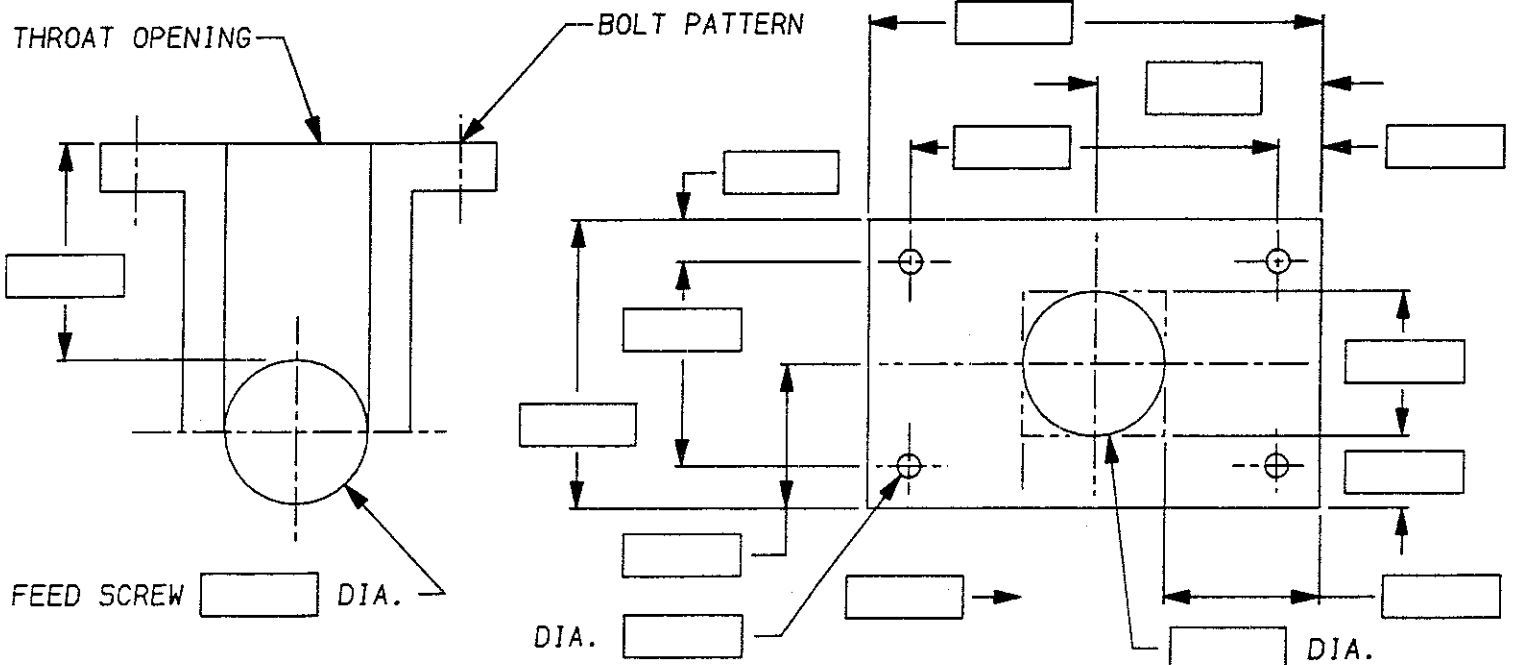

(PLEASE NOTE ANY EXCEPTIONS FROM STANDARD COMPONENTS OR OPERATING CHARACTERISTICS, I.E. TANGENTIAL FEED THROAT.) (USE REVERSE SIDE IF NECESSARY)

REMARKS: _____

FAX NOTE	# OF PAGES FAXED:
	DATE:
TO:	FROM:
CO.:	CO.: FOREMOST MACHINE BLD.
PHONE #	PHONE # (973) 227-0700
FAX #	FAX # (973) 227-7307